



VariCool EZ-Fit®



- 12 to 90 Tons
- Variable Air Volume
- Water-Cooled
- Water Source Heat Pump
- DOAS (Dedicated Outdoor Air System)

Unique Solutions for All-Indoor HVAC Projects

Modular Floor-by-Floor Air Conditioning Systems

The VariCool EZ-Fit is a self-contained, modular air conditioning system for use with floor-by-floor variable air volume applications. It is engineered and manufactured specifically for installation in renovation and retrofit projects and provides the ultimate **All-Indoor Solution** for challenging HVAC applications.

The VariCool EZ-Fit design consists of three distinct sections that easily mate to form a system module. The module consists of a fan section, evaporator coil section and condensing section. Single modules are available in 12-15 ton, 20-25 ton, 30-35 ton and 40-45 ton sizes. Dual modules together form systems as large as 90 tons of cooling.

Sections are assembled during manufacturing and evacuated, charged, tested, and then separated for shipment of individual sections. The use of resealable refrigerant fittings allow the unit to be shipped split without losing the charge. All module sections are joined together using innovative 3D-Intelliclamp connectors which ensure perfect component alignment. The result is a lower installed cost without any sacrifice of system reliability.



FEATURES

- 12 to 90 tons
- Water-Cooled
- Dual Scroll Compressors/Module
- Interlaced Evaporator Coils
- Premium Efficiency Motors
- Double Sloped Stainless Steel Drain Pan
- Hot Gas Bypass (each circuit)
- Lift Off Hinged Panels
- Belt Drive Airfoil DWDI Blower with Backward Inclined Blades (12-25 Ton Modules)
- Direct-Drive Parallel Fans (30-35 & 40-45 Ton Modules)
- Factory Mounted VFD Controllers
- Microprocessor Control
- 3D-Intelliclamp Cabinet Section Connectors

Individual sections fit through standard 3-0 doors or smaller and into most elevators. They can also be maneuvered down narrow hallways which means no modifications or alterations to the building are needed and installation time is quicker and less costly to accomplish.

As with all United CoolAir systems, a wide variety of features and a host of options allow every system to be tailored to the specific project at hand.

Avoid Requirements that Lead to Extra Expense

Expensive Equipment, Rigging or Permits

Our units fit thru standard doors, hallways & elevators eliminating crane rentals, rigging crews & permits.



Equipment Damage Due to Weather

All indoor installation avoids premature replacement costs & downtime due to weather damage.



Roofcurbs or Roof Penetration

Removes expensive curb equipment & installation labor cost reducing possible roof water damage.




Possibility of Theft or Vandalism

Eliminates expensive repairs & replacements due to theft & vandalism enhancing building security.



Field Piping, Brazing, Evacuation or Charging

Factory charged & utilizing Resealable Refrigerant Fittings speeds installation & commissioning.



Field Testing of Installed Product

Minimizes field-testing as units are tested prior to shipment reducing labor and expediting installation.



Excessive Downtime when Replacing Old Systems

Sectional shipments accelerate installation and can be installed off-hours or weekends.



Outdoor Servicing of Product

Outdoor/premium service expense in extreme weather completely eliminated, improving reliability while removing roof safety issues.



Architectural Damage to Building

Eliminates expenses for code approvals and minimizes any type of building alteration.




Major Ductwork or Electrical Modifications

Units ordered to closely match existing duct and utility locations leading to saving labor and time.




No Compromise in Performance with Built-to-Order Design

Built to exact requirements with extensive list of configurations and over 100 options.



Exterior Condensing System

Eliminates rooftop & pad installation space & cost.

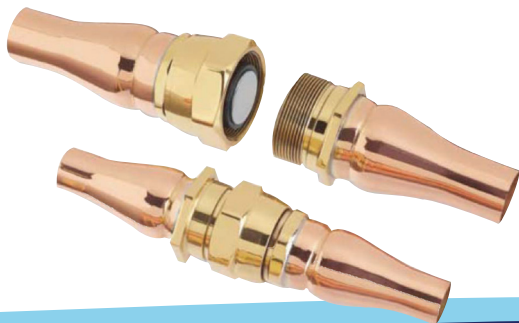

Resealable Refrigerant Fittings

Most models feature Resealable Refrigerant Fittings. Unit sections can be shipped split or split in the field without losing the factory charge resulting in no field brazing and a total installed cost advantage. Mating male and female fittings used on the refrigerant lines allow units to be evacuated, charged and leak tested prior to shipment. Modular sections can then be separated for rigging and installation and then reconnected for system operation.

Ideal for Renovation and Replacement Projects

The VariCool EZ-Fit modular design and features provide the ideal retrofit and replacement design for many projects. However, it does not always provide the ideal product solution and that is why United CoolAir offers an extensive list of options to further match each VariCool EZ-Fit unit to the specific application requirements. These options are designed to optimize performance while minimizing installation complexity, time and expense.

POPULAR OPTIONS

- More than 25 cabinet sizes available
- ECM Fans
- Variable Speed Compressor
- BMS Interface
- High Efficiency Filters
- Double Wall Construction
- Water Side Economizer
- Hot Water, Steam, or Electric Heat
- Lead Circuit Digital Scroll Compressors
- Internally Isolated DDP Fan Systems
- Direct Drive Parallel Fan Systems
- Painted Cabinets



TYPICAL APPLICATIONS

- Healthcare Facilities
- Universities/Schools
- High Rise Buildings
- Office Buildings
- Commercial/Retail Centers
- Laboratories
- Lobbies
- Conference Rooms
- Churches

Your Choice for Building Management System Interface Options

The VariCool EZ-Fit system is designed to operate using the full-featured Marvel Premium microprocessor control system. The Marvel Premium control system incorporates a Marvel Premium Microprocessor Control and a Marvel Premium Wall Mount display.

The power of the Marvel Premium control system can be put to good use through integration with an existing Building Management System. The system is compatible with most protocols including BACnet™ over MS/TP (RS485 Serial), BACnet over IP (Ethernet/EIA485), ModBus™ RS485 Serial Connection, ModBus™ TCP over IP, or other systems using a Serial interface card.

A large number of analog and digital inputs and outputs come standard which allows most single and multiple-unit projects to control and communicate the most important aspects of operation and alarm status. In addition, up to 16 controllers can be networked to a single wall display.

IoT allows for remote connectivity to provide support from United CoolAir.



Marvel Premium Microprocessor Control System in unit



Marvel Premium Wall Display

WATER-COOLED PERFORMANCE DATA					
	Nominal Tons	Total MBH	Sensible MBH	CFM	GPM
Single	12	165.8	117.1	4800	36
	15	202.0	143.5	6000	45
	20	260.2	187.7	8000	60
	25	300.9	213.0	9000	72
	30	382.2	283.5	12000	90
	35	451.6	330.7	14000	105
	40	480.1	364.5	15000	120
	45	600.2	415.6	15000	136
Dual	24	331.6	234.2	9600	72
	30	404.0	287.0	12000	90
	40	520.4	375.4	16000	120
	50	601.8	426.0	18000	144
	60	764.4	567.0	24000	180
	70	903.2	661.4	28000	210
	80	960.2	729.0	30000	240
	90	1200.4	831.2	30000	272

Contact the factory for Water Source Heat Pump models


Case Study

EMBLEMHEALTH FACILITY

MANHATTAN, NY

EmblemHealth Chose the VariCool EZ-Fit System for a Successful Replacement Project

United CoolAir was hired for a project at an EmblemHealth facility located in Manhattan, NY. The building was erected in the early 1970's and the mechanical systems have been running for over 25 years. The air conditioning system had to be replaced quickly with the least amount of disruption to the patients, service providers and staff.

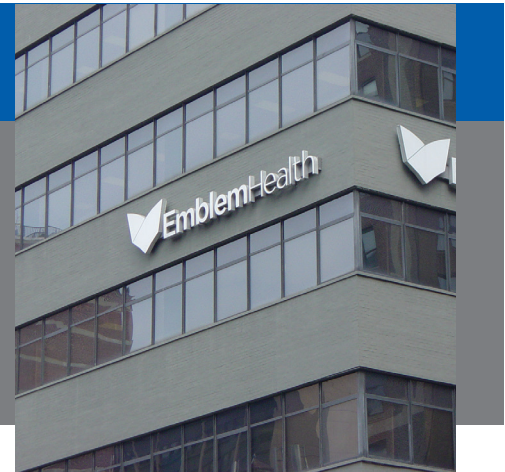

The EmblemHealth building had four existing units spread out from the basement, main floor and at an upper level. Sizes ranged up to 45 tons and the replacement units would need to be the same size. Many of the systems were installed during the building construction when access was not an issue. It is generally not a problem to remove the old air conditioning system because the units are disassembled and scrapped, but installing the new units can be tricky. This is where we came in to help.

Our distributor, MWSK Equipment, was hired for this project and Fredi Taruc, Sales Engineer at MWSK, immediately thought of United CoolAir's VariCool EZ-Fit system as the best option for the replacement.



The Dual-Module VariCool EZ-Fit unit that was installed

Regardless of the entry method, the installation cost can easily exceed the equipment cost when you measure man hours, permits and special equipment necessary to complete the job. There's the additional time needed for demolition, installation and final commissioning.

"Often the HVAC contractor has to do a lot of preparation work in order to fit a system through small passageways. Larger units may have to be raised by crane to upper floors and require rigging, permits and building modification. If they take it through the building, the unit may have to be delivered partially disassemble and reassembled on site, or walls and doorways opened to allow access," said Taruc.

EmblemHealth needed to get the replacement units in quickly and with as little building modification as possible.

Unlike most commercial buildings, healthcare facilities are generally active 24 hours each day. The retrofit was scheduled for two weekends with two units replaced each weekend. John McBride, Design Engineer for JFK & M Consulting Group made sure the replacement work would not interrupt the facility's busy weekend schedule.



Left: Joe Ptak, Chief Engineer for EmblemHealth. Right: Fredi Taruc, Sales Engineer at MWSK

"The old equipment was removed on a Friday and the replacement units were brought in with minimal interference with the hospital's operations. The modular sections were quickly reassembled and connected to the existing hookups. Since the units were pre-charged at the factory, brazing, evacuation and charging in the field were eliminated saving many hours of valuable labor. The units were operational by Monday morning at the start of the new week," said McBride.

This came as no surprise to Joe Ptak, Chief Building Engineer for EmblemHealth, who was first introduced to United CoolAir air conditioning systems. The initial units were installed in his building and he has been very satisfied.

"I was very pleased with the performance of their units then and I recommend using United CoolAir systems for all the other EmblemHealth mechanical system replacements," said Ptak.



EXAMPLE: $\frac{VZ}{a}$ $\frac{W}{b}$ $\frac{R}{c}$ $\frac{20}{d}$ $\frac{G}{e}$ $\frac{3}{f}$ $\frac{A}{g}$ $\frac{T}{h}$ $\frac{A}{i}$ $\frac{A}{j}$ $\frac{30}{k}$ - $\frac{A}{l}$ - $\frac{X}{m}$

- a. "VZ" = VariCool EZ-Fit
- b. "W", "CW" or "A"
 "W" = Water-Cooled
 "A" = Air Cooled w/ Remote Air Cooled Condenser
- c. "R", "L" or "D" Module Quantity/ Style
 "R" = Right Hand Single Module
 "L" = Left Hand Single Module
 "D" = Dual Module
- d. "12", "15", "20", "25", "30", "35", "40" or "45" Nominal Cooling Capacity in Tons (Single Module)
 "24", "30", "40", "50", "60", "70", "80" or "90" Nominal Cooling Capacity in Tons (Dual Module)
- e. "G" Common to all
- f. "3", "4" or "5" Indicates Power Supply
 "3" = 208/230-3-60
 "4" = 460-3-60
 "5" = 575-3-60
- g. "AS", "A", "B", "D", "-"
 "AS" = One Compressor
 "A" = Two Compressors
 "B" = Three Compressors
 "D" = Four Compressors
- h. "T" Traditional Cabinet
 "C" Custom Cabinet
- i. "A" or "-" Refrigerant
 "A" = R410a Refrigerant
- j. "A", "B", "C" Blower Type
 "A" = DWDI Blower
 "B" = Parallel Direct Drive Fan
 "C" = ECM Fans
- k. Nominal Heat kW
- l. "A", "C", "R" or "S" Evaporator Air Path
 Note: For side discharge, single module only. Contact factory for details.
- m. "X" = Special Configuration

EVAPORATOR AIR PATHS				
Blower Type	Front	Top	Rear	Side
DWDI Blower	"C"	"A"	"R"	NA
Direct Drive Parallel Fans	Not Available	"A"	"R"	S
ECM Fans	"C"	"A"	"R"	S

Not all combinations of unit Product Nomenclature are valid. Check with the factory for correct model identification.

Unique Solutions for All-Indoor HVAC Projects



VertiCool Aurora
Vertical, 3 - 35 Tons



VariCool® Renovator
42 - 80 Tons



VariCool® EZ-Fit
VAV, 12 - 90 Tons



Alpha Aire Horizontal & Vertical
100 - 500 CFM



Portable Cooling and Heating Units
3-30 Tons



C13-Series Horizontal
2 - 10 Tons



C-Series Horizontal
1 - 15 Tons
Special Configuration
Engineered to Order



OmegaAir Horizontal & Vertical
100% Outside Air
150 - 3000 CFM

Authorized Distributor:



LIMITED WARRANTY

United CoolAir Units are backed by a 1 year limited warranty on parts and a 5 year limited warranty on the compressor (labor not included). Maintenance items such as filters and belts are excluded under this limited warranty.

FACTORY TESTED

All units are functionally run tested before shipment to ensure a trouble-free start-up and unit commissioning. Industry proven components are used throughout to enhance system reliability and peace of mind.



Scan to learn more
about all of our
products!

 **UNITED
CoolAir**
All-Indoor Solutions

491 East Princess Street, York, PA 17403 Phone: 717-843-4311 Fax: 717-854-4462
email: uca@unitedcoolair.com web: www.unitedcoolair.com



Copyright © by United CoolAir Corporation 2021. All rights reserved.
Manufacturer reserves the right to make changes without notice.

